

Sustainable Lathe Machine Selection Using PROMETHEE

Ovundah King Wofuru-Nyenke ^{1*} 

¹ Department of Mechanical Engineering, Rivers State University, Port Harcourt, Rivers State, Nigeria.

*Correspondence: ovundah.wofuru-nyenke@ust.edu.ng

Received: 1 May 2025 / Accepted: 29 May 2025 / Published: 2 June 2025

© The Author(s) 2025.

Abstract

The manufacturing echelon of supply chains utilizes several machines for converting raw materials into finished products. Therefore, during procurement of these machines, supply chain managers are usually saddled with the problem of obtaining the best machine from a group of similar alternatives, considering multiple criteria simultaneously. The main purpose of this study is to utilize the Preference Ranking Organization Method for Enrichment Evaluation (PROMETHEE) for selecting the best lathe machine from a group of five (5) similar alternatives namely: Lathe 1, Lathe 2, Lathe 3, Lathe 4 and Lathe 5. Four (4) criteria were used in evaluating the machines namely: power, price, complexity and weight, with preference weights of 0.25, 0.3, 0.25 and 0.2 respectively. The results indicated that Lathe 2 is the best alternative because it has the highest total net flows of 0.325, followed by Lathe 5 which has total net flows of 0.03. Next is Lathe 1 which has total net flows of -0.0188, followed by Lathe 3 having total net flows of -0.0975, and finally, Lathe 4 which is the worst ranking alternative having total net flows of -0.2388. Therefore, PROMETHEE proved to be a viable multi-criteria decision-making tool for selecting the most suitable lathe machine among the group of alternative machines. This study is significant because it provides a procedure for aiding supply chain managers in selecting the best alternative among a group of similar alternatives using PROMETHEE.

Keywords: Lathe, Machine Selection, Multi-criteria Decision Analysis, PROMETHEE

1. Introduction

Supply chain managers are responsible for the management of various activities within supply chain networks. There are several methods for optimally managing production processes (Wofuru-Nyenke, 2024d; Zekhnini et al., 2021). The management process is usually tedious when the correct procedure is not consistently followed or the various components of business management are not effectively combined. This could lead to various forms of waste within the manufacturing supply chain, especially when managers cannot predict uncertainty within the supply chain (Dora et al., 2021; Nyenke, 2021; Wofuru-Nyenke & Briggs, 2022; Wofuru-Nyenke, 2022; Wofuru-Nyenke et al., 2023; Wofuru-Nyenke et al., 2019). The main components of business management are money, manpower, materials, methods and machines. Money refers to the capital utilized in production of goods and offering of services. It is important for the acquisition of raw materials, personnel hiring, acquisition of machines as well as equipping costs incurred during the operation of the supply chain. Manpower refers to the skilled and unskilled workers involved in production of goods and rendering of services. Materials refer to the raw supplies that are fed into the supply chain, and used to produce semi-finished or finished goods. Methods refer to the usual and recommended procedures of carrying out operations within the supply chain, in accordance with established systems. Machines refer to the equipment used in converting the raw materials into semi-finished or finished products (Rizzo et al., 2020; Wofuru-Nyenke, 2021). Machines are very crucial for the profitability and survival of supply chains (Rinaldi et al., 2021; Wofuru-Nyenke, 2024a; Wofuru-Nyenke, 2023a, 2023b). This is because rapid product output from the

manufacturing echelon of supply chains is usually as a result of well-running machinery, which can in turn provide the entire supply chain with a competitive edge (Ugoji et al., 2022; Wofuru-Nyenke, 2024c).

During procurement of machines, managers usually encounter the problem of deciding which machine is the best among alternatives. This is a complex problem because the machines need to be evaluated by considering multiple criteria simultaneously. Multi-criteria decision analysis models have proven to be efficient in solving these types of decision-making problems involving evaluations based on multiple criteria. These methods can be employed in supplier selection, materials selection, production scheduling, routing, inventory management, pricing strategies as well as evaluation of various product designs, to name a few. Preference Ranking Organization Method for Enrichment Evaluation (PROMETHEE) has been utilized in a lot of decision-making problems in engineering. The methodology has been applied to the complex and strategic problem of selecting a lean manufacturing system compared to a computer integrated manufacturing system, considering the benefits to be gained and the impact on stakeholders of the organization (Anand & Kodali, 2008). It has also been applied to rank and select appropriate dispatching rules for a Dual-Resource Constrained manufacturing system (Araz, 2005). The methodology has been applied to manufacturing scheduling by providing the ranking of alternative schedules based on completion times (Belz & Mertens, 1996; Duvivier et al., 2007; Roux et al., 2008). Furthermore, the methodology has been combined with Bayesian method to address equipment failure uncertainty by preventive maintenance planning and failure control in the context of equipment breakdown (Cavalcante & De Almeida, 2007). Similarly, the method has been used for determining the optimal preventive-maintenance intervals (Chareonsuk et al., 1997). The method has been applied to the problem of selecting the optimal solution for an inverse electromagnetic scattering problem (Parreiras et al., 2006). PROMETHEE has also been used to rank alternatives during assembly planning as well as select the best equipment combination for individual stations with the aid of multi-objective grouping genetic algorithm (Rekiek et al., 2002; Rekiek et al., 2001). Moreover, it has been applied to the problem of choosing a predictive maintenance program within an automotive paint shop (Waeyenbergh et al., 2004).

Lathe machines are machine tools that operate by rotating a cylindrical workpiece about an axis of rotation to perform various operations such as cutting, drilling, sanding, knurling, facing, deformation and turning with the aid of a tool applied to the workpiece to create an object which is symmetrical about that axis. Lathe machines are very important machinery within major metalworking plants that produce metal products (Mastos et al., 2020; Wofuru-Nyenke, 2024b; Wofuru-Nyenke, 2020). The main purpose of this study is to utilize PROMETHEE for selecting the best lathe machine from a group of similar alternatives. PROMETHEE provides the decision maker with a ranking of alternatives based on global or total net flows. The following sections describe the underlying equations of PROMETHEE, and the results of applying the equations to the lathe machine selection problem.

2. Methodology

In the PROMETHEE method, alternatives are pairwise compared in order to find the most appropriate alternative. The set of alternatives to be ranked are denoted by $A = \{a_1, a_2, \dots, a_n\}$ and the set of criteria are denoted by $F = \{f_1, f_2, \dots, f_m\}$. Also, denoting the evaluation of alternative a_j on criterion f_i by $f_i(a_j)$ and assuming that $f_i(a_j)$ is a numeric value. A preference matrix is generated from the data, and is used in calculating the global flows. The global pairwise preference degrees computed between all the ordered pairs of alternatives, constitutes the preference matrix. The global preference degrees are obtained from the criterion preference degrees by means of the weighted sum, and provide the basis for deducing the global flows.

2.1. Unicriterion Preference Degrees

The unicriterion preference degree P_{ij}^k , which can also be denoted as $P_k(a_i, a_j)$, is calculated for each ordered pair of alternatives (a_i, a_j) . This unicriterion preference degree, P_{ij}^k , depicts how much more preferred alternative a_i is to a_j

based solely on criterion f_k . P_{ij}^k will be a number between 0 and 1, and is a function of $f_k(a_i) - f_k(a_j)$, the more this difference, the stronger the unicriterion preference degree. A choice between three different types of preference functions has to be made by the decision maker, which in turn determines the preference degree. Considering the linear preference function with q as the indifference threshold and p as the preference threshold, the equation for the unicriterion preference degree is given by (Brans et al., 2005; Brans & Vincke, 1985) :

$$P_{ij}^k = \begin{cases} 0 & \text{if } f_k(a_i) - f_k(a_j) \leq q \\ \frac{[f_k(a_i) - f_k(a_j) - q]}{[p - q]} & \text{if } q < f_k(a_i) - f_k(a_j) < p \\ 1 & \text{if } f_k(a_i) - f_k(a_j) \geq p \end{cases} \quad (1)$$

However, if a Gaussian preference function is considered the equation for the unicriterion preference degree is given by (Ishizaka & Nemery, 2013)

$$P_{ij}^k = \begin{cases} 1 - \exp\left(\frac{-(f_k(a_i) - f_k(a_j))^2}{2s^2}\right) & \text{if } f_k(a_i) - f_k(a_j) \geq 0 \\ 0 & \text{otherwise} \end{cases} \quad (2)$$

where s is the inflexion point. P_{ij}^k and P_{ji}^k are not symmetric numbers but respect the condition $0 \leq P_{ij}^k + P_{ji}^k \leq 1$.

2.2. Global Preference Degree

After calculating the ordered unicriterion preference degrees, the global preference degree, π_{ij} , can be computed taking the weights of each criterion into account. Denoting w_k as the weight associated to criterion f_k . If the weight respects the condition $\sum_{k=1}^q w_k = 1$, then the global preference degree of alternative a_i on a_j is given by (Ishizaka & Nemery, 2013):

$$\pi(a_i, a_j) = \pi_{ij} = \sum_{k=1}^q w_j \cdot P_{ij}^k \quad (3)$$

where w_j is the weight of a criterion j , and P_{ij}^k is the unicriterion preference degree. This global preference degree lies between 0 and 1, and respects the constraint $0 \leq \pi_{ij} + \pi_{ji} \leq 1$. Therefore, $\forall i : \pi_{ii} = 0$.

2.3. Global Flows

The ordered preference degrees are summarized into a unique score for each alternative, using the positive and negative flows. Denoting by $\Phi^+(a_i)$ the positive flows of alternative a_i and $\Phi^-(a_i)$ the negative flows of alternative a_i . Their values can be computed as follows (Ishizaka & Nemery, 2013):

$$\Phi^+(a_i) = \frac{\sum_{j=1}^n \pi_{ij}}{n - 1} \quad (4)$$

$$\Phi^-(a_i) = \frac{\sum_{j=1}^n \pi_{ji}}{n - 1} \quad (5)$$

where π_{ij} is the global preference degree of alternative a_i on a_j , and π_{ji} is the global preference degree of alternative a_j on a_i .

2.4. Net Flows

The net flows, $\Phi(a_i)$, summarizes the positive and negative flows with one formula, given by (Ishizaka & Nemery, 2013):

$$\Phi(a_i) = \Phi^+(a_i) - \Phi^-(a_i) \quad (6)$$

where $\Phi^+(a_i)$ is the positive flows of alternative a_i and $\Phi^-(a_i)$ is the negative flows of alternative a_i . The net flow is a number between -1 and 1. The higher this number is, the better the alternative will be.

3. Results and Discussion

This section presents the results of applying the PROMETHEE method to the lathe machine selection problem. The objective is to rank five (5) different lathe machines based on four (4) criteria, namely: power, price, complexity, weight. The power criterion is to be maximized, the price criterion is to be minimized, the complexity criterion is to be minimized, and the weight criterion is to be minimized for each of the lathe machines. Table 1 shows the raw performance data of the various lathe machines and the selection criteria.

Table 1: Performance of the five (5) lathe machines evaluated on four (4) criteria.

	Power (hp)	Price (\$)	Complexity	Weight (lb)
Objective	MAX	MIN	MIN	MIN
Lathe 1	30	1500	Extreme	1000
Lathe 2	40	1380	Medium	1200
Lathe 3	50	2500	High	1500
Lathe 4	60	4750	Medium	2400
Lathe 5	100	6300	Low	3100

Figure 1 shows the numeric values of the complexity criteria on a complexity scale. From Figure 1, low complexity corresponds to a numeric value of 2, medium complexity corresponds to a numeric value of 4, high complexity corresponds to a numeric value of 6, and extreme complexity corresponds to a numeric value of 8, on the complexity scale.



Figure 1: Numeric Complexity Scale.

Therefore, from the performance data in Table 1 and the numerical scale in Figure 1, Lathe 1 has a complexity of 8, Lathe 2 has a complexity of 4, Lathe 3 has a complexity of 6, Lathe 4 has a complexity of 4 and Lathe 5 has a complexity of 2. Table 2 shows the preference parameters for all the criteria.

Table 2: Criteria Preference Parameters.

Criterion	Function	Weight, w_i	Indifference Threshold, q_i	Preference Threshold, p_i
Power	Linear	0.25	20	40
Price	Linear	0.3	600	1000
Complexity	Linear	0.25	1	2
Weight	Linear	0.2	500	1000

From Table 2, the power criterion has a linear preference function, a weight of 0.25, indifference threshold of 20, and preference threshold of 40. Also, the price criterion has a linear preference function, a weight of 0.3, indifference threshold of 600, and preference threshold of 1000. Furthermore, the complexity criterion has a linear preference function, a weight of 0.25, indifference threshold of 1 and preference threshold of 2. Moreover, the weight criterion has a linear preference function, a weight of 0.2, indifference threshold of 500 and preference threshold of 1000. Table 3 shows the differences between evaluations of the lathes on power criterion.

Table 3: Differences between evaluations of the lathes on power criterion.

	Lathe 1	Lathe 2	Lathe 3	Lathe 4	Lathe 5
Lathe 1	0	-10	-20	-30	-70
Lathe 2	10	0	-10	-20	-60
Lathe 3	20	10	0	-10	-50
Lathe 4	30	20	10	0	-40
Lathe 5	70	60	50	40	0

From Table 3, considering the power criterion which has to be maximized, all lathes compared with themselves result in a difference of 0. Lathe 1 compared with Lathe 2 results in a difference of 10. Lathe 1 compared with Lathe 3 results in a difference of 20. Lathe 1 compared with Lathe 4 results in a difference of 30. Finally, Lathe 1 compared with Lathe 5 results in a difference of 70. Table 4 shows the differences between evaluations of the lathes on price criterion.

Table 4: Differences between evaluations of the lathes on price criterion.

	Lathe 1	Lathe 2	Lathe 3	Lathe 4	Lathe 5
Lathe 1	0	120	-1000	-3250	-4800
Lathe 2	-120	0	-1120	-3370	-4920
Lathe 3	1000	1120	0	-2250	-3800
Lathe 4	3250	3370	2250	0	-1550
Lathe 5	4800	4920	3800	1550	0

From Table 4, considering the price criterion which has to be minimized, all lathes compared with themselves result in a difference of 0. Lathe 1 compared with Lathe 2 results in a difference of 120. Lathe 1 compared with Lathe 3 results in a difference of 1000. Lathe 1 compared with Lathe 4 results in a difference of 3250. Finally, Lathe 1 compared with Lathe 5 results in a difference of 4800. Table 5 shows the differences between evaluations of the lathes on complexity criterion.

Table 5: Differences between evaluations of the lathes on complexity criterion.

	Lathe 1	Lathe 2	Lathe 3	Lathe 4	Lathe 5
Lathe 1	0	4	2	4	6
Lathe 2	-4	0	-2	0	2
Lathe 3	-2	2	0	2	4
Lathe 4	-4	0	-2	0	2
Lathe 5	-6	-2	-4	-2	0

From Table 5, considering the complexity criterion which has to be minimized, all lathes compared with themselves result in a difference of 0. Lathe 1 compared with Lathe 2 results in a difference of 120. Lathe 1 compared with Lathe 3 results in a difference of 1000. Lathe 1 compared with Lathe 4 results in a difference of 3250. Finally, Lathe 1 compared with Lathe 5 results in a difference of 4800. Table 6 shows the differences between evaluations of the lathes on weight criterion.

Table 6: Differences between evaluations of the lathes on weight criterion.

	Lathe 1	Lathe 2	Lathe 3	Lathe 4	Lathe 5
Lathe 1	0	-200	-500	-1400	-2100
Lathe 2	200	0	-300	-1200	-1900
Lathe 3	500	300	0	-900	-1600
Lathe 4	1400	1200	900	0	-700
Lathe 5	2100	1900	1600	700	0

From Table 6, considering the weight criterion which has to be minimized, all lathes compared with themselves result in a difference of 0. Lathe 1 compared with Lathe 2 results in a difference of 200. Lathe 1 compared with Lathe 3 results in a difference of 500. Lathe 1 compared with Lathe 4 results in a difference of 1400. Finally, Lathe 1 compared with Lathe 5 results in a difference of 2100. Table 7 shows the pairwise comparison matrix for the power criterion.

Table 7: Pairwise comparison matrix for the power criterion.

	Lathe 1	Lathe 2	Lathe 3	Lathe 4	Lathe 5
Lathe 1	0	0	0	0	0
Lathe 2	0	0	0	0	0
Lathe 3	0	0	0	0	0
Lathe 4	0.5	0	0	0	0
Lathe 5	1	1	1	1	0

From Table 7, comparing the differences with the preference and indifference thresholds based on the power criterion, Lathe 4 has a preference degree of 0.5 over Lathe 1. Moreover, the preference degree of Lathe 5 over Lathe 1, Lathe 2, Lathe 3 and Lathe 4 is 1. This means that based on the power criterion Lathe 5 is preferred. Table 8 shows the pairwise comparison matrix for the price criterion.

Table 8: Pairwise comparison matrix for the price criterion

	Lathe 1	Lathe 2	Lathe 3	Lathe 4	Lathe 5
Lathe 1	0	0	1	1	1
Lathe 2	0	0	1	1	1
Lathe 3	0	0	0	1	1
Lathe 4	0	0	0	0	1
Lathe 5	0	0	0	0	0

From Table 8, comparing the differences with the preference and indifference thresholds based on the price criterion, Lathe 1 has a preference degree of 1 over Lathe 3, Lathe 4 and Lathe 5. Moreover, the preference degree of Lathe 2 over Lathe 3, Lathe 4, Lathe 5 is 1. Again, the preference degree of Lathe 3 over Lathe 4 and Lathe 5 is 1. Furthermore, the preference degree of Lathe 4 over Lathe 5 is 1. This means that based on the price criterion Lathe 1 and Lathe 2 are preferred over Lathe 3, Lathe 4 and Lathe 5. While Lathe 3 is preferred over Lathe 4 and Lathe 5, and Lathe 4 is preferred over Lathe 5. Table 9 shows the pairwise comparison matrix for the complexity criterion.

Table 9: Pairwise comparison matrix for the complexity criterion

	Lathe 1	Lathe 2	Lathe 3	Lathe 4	Lathe 5
Lathe 1	0	0	0	0	0
Lathe 2	1	0	1	0	0
Lathe 3	1	0	0	0	0
Lathe 4	1	0	1	0	0
Lathe 5	1	1	1	1	0

From Table 9, comparing the differences with the preference and indifference thresholds based on the complexity criterion, when the preference degree is 0, it indicates that the difference in price is lower than the indifference threshold and there is no difference between the two lathe machines being compared. On the other hand, when the preference degree is 1, it indicates that the difference between the two lathe machines being compared is greater than the preference threshold, therefore, there is a difference between the two lathe machines being compared. Table 10 shows the pairwise comparison matrix for the weight criterion.

Table 10: Pairwise comparison matrix for the weight criterion

	Lathe 1	Lathe 2	Lathe 3	Lathe 4	Lathe 5
Lathe 1	0	0	0	1	1
Lathe 2	0	0	0	1	1
Lathe 3	0	0	0	0.8	1
Lathe 4	0	0	0	0	0.4
Lathe 5	0	0	0	0	0

From Table 10, comparing the differences with the preference and indifference thresholds based on the weight criterion, when the preference degree is 0, it indicates that the difference in price is lower than the indifference threshold and there is no difference between the two lathe machines being compared. When the preference degree is between 0 and 1, it implies that the difference between the lathe machines being compared is between the indifference and preference thresholds. On the other hand, when the preference degree is 1, it indicates that the difference between the two lathe machines being compared is greater than the preference threshold, therefore, there is a difference between the two lathe machines being compared. Table 11 shows the pairwise preference matrix considering all the criteria and their weights.

Table 11: Pairwise preference matrix

	Lathe 1	Lathe 2	Lathe 3	Lathe 4	Lathe 5
Lathe 1	0	0	0.3	0.5	0.5
Lathe 2	0.25	0	0.55	0.5	0.5
Lathe 3	0.25	0	0	0.46	0.5
Lathe 4	0.375	0	0.25	0	0.38
Lathe 5	0.5	0.5	0.5	0.5	0

From Table 11, the total positive flows, total negative flows and total net flows for each lathe machine was calculated and these data are shown in Table 12.

Table 12: Total Positive Flows, Total Negative Flows and Total Net Flows

Lathes	Total Positive Flows	Total Negative Flows	Total Net Flows
Lathe 1	0.325	0.34375	-0.0188
Lathe 2	0.45	0.125	0.325
Lathe 3	0.3025	0.4	-0.0975
Lathe 4	0.25125	0.49	-0.2388
Lathe 5	0.5	0.47	0.03

From Table 12, the total positive flows were calculated by averaging all the row preference degrees of a lathe compared to other lathes, excluding the preference degree of the lathe compared with itself. The total negative flows were calculated by averaging all the column preference degrees of a lathe, excluding the preference degree on the diagonal. The total net flows were obtained by subtracting the negative flows from the positive flows. Figure 2 is a plot of total net flows versus lathe machine type and it shows the ranking of the lathe machines based on the total net flows.

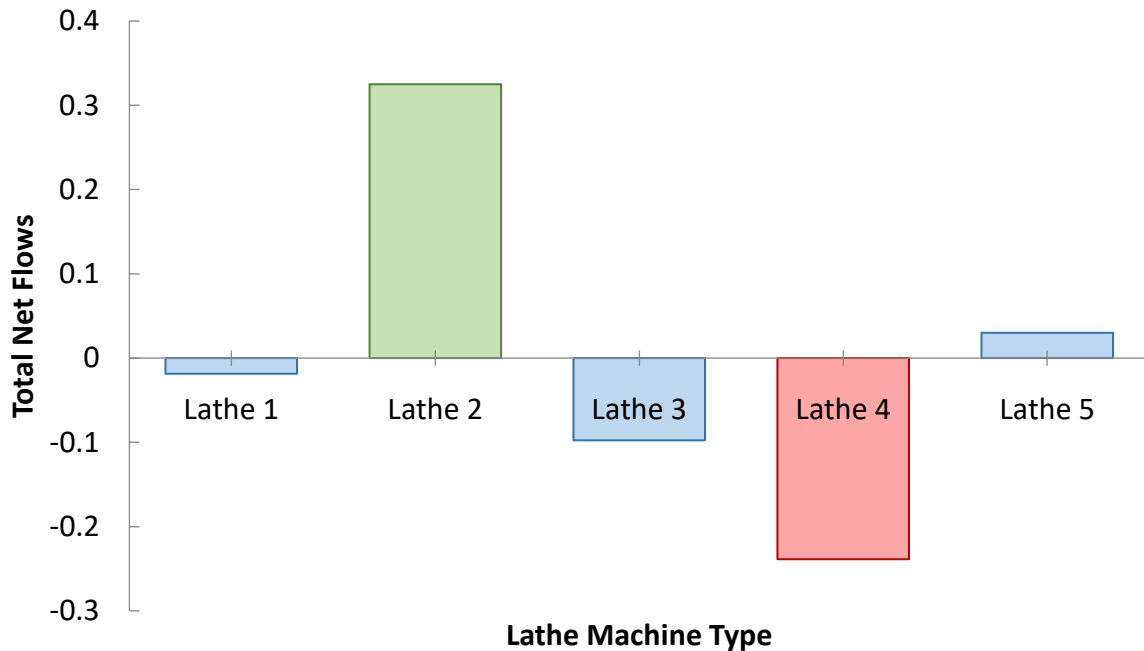


Figure 2: Plot of Total Net Flows versus Lathe Machine Type.

From Figure 2, Lathe 2 is the best alternative because it has the highest total net flows of 0.325, followed by Lathe 5 which has total net flows of 0.03. Next is Lathe 1 which has total net flows of -0.0188, followed by Lathe 3 having total net flows of -0.0975, and finally, Lathe 4 which is the worst ranking alternative having total net flows of -0.2388. This provides the ranking of the various lathe machines under consideration based on power, price, complexity and weight criteria having linear preference functions.

4. Conclusion

During procurement of machines for manufacturing, managers are faced with the problem of selecting the best machine among similar alternatives. The machine selection problem is complex because the decision usually has to be made considering more than one criterion. This study utilizes PROMETHEE for selecting the best lathe machine from a group of five similar alternatives namely: Lathe 1, Lathe 2, Lathe 3, Lathe 4 and Lathe 5. The machines were evaluated based on criteria such as power, price, complexity and weight, having preference weights of 0.25, 0.3, 0.25 and 0.2 respectively. The results indicated that Lathe 2 is the best alternative because it has the highest total net flows of 0.325, followed by Lathe 5 which has total net flows of 0.03. Next is Lathe 1 which has total net flows of -0.0188, followed by Lathe 3 having total net flows of -0.0975, and finally, Lathe 4 which is the worst ranking alternative having total net flows of -0.2388. The study provides a procedure for selecting the best alternative among a group of similar alternatives using PROMETHEE. For further research, other multi-criteria decision analysis methods and method combinations can be utilized in selecting the best machine among a group of machines during procurement. Also, the performance of each alternative can be investigated considering a situation where the preference functions of each criterion is not linear.

References

- Anand, G., & Kodali, R. (2008). Selection of lean manufacturing systems using the PROMETHEE. *Journal of modelling in management*, 3(1), 40-70.
- Araz, O. U. (2005). A simulation based multi-criteria scheduling approach of dual-resource constrained manufacturing systems with neural networks. *Australasian Joint Conference on Artificial Intelligence*,
- Belz, R., & Mertens, P. (1996). Combining knowledge-based systems and simulation to solve rescheduling problems. *Decision Support Systems*, 17(2), 141-157.
- Brans, J., Mareschal, B., Figueira, J., & Greco, S. (2005). Multiple criteria decision analysis: state of the art surveys. *New York, USA: Springer Science+ Business Media, Inc*, 163-196.
- Brans, J., & Vincke, P. (1985). Preference Ranking Organization Method-(the Promethee Method for Multiple Criteria Decision-Making). *Management Science*, 31, 647-656.
- Cavalcante, C., & De Almeida, A. (2007). A multi-criteria decision-aiding model using PROMETHEE III for preventive maintenance planning under uncertain conditions. *Journal of Quality in Maintenance Engineering*, 13(4), 385-397.
- Chareonsuk, C., Nagarur, N., & Tabucanon, M. T. (1997). A multicriteria approach to the selection of preventive maintenance intervals. *International Journal of Production Economics*, 49(1), 55-64.
- Dora, M., Biswas, S., Choudhary, S., Nayak, R., & Irani, Z. (2021). A system-wide interdisciplinary conceptual framework for food loss and waste mitigation strategies in the supply chain. *Industrial Marketing Management*, 93, 492-508.
- Duvivier, D., Roux, O., Dhaevers, V., Meskens, N., & Artiba, A. (2007). Multicriteria optimisation and simulation: an industrial application. *Annals of Operations Research*, 156, 45-60.
- Ishizaka, A., & Nemery, P. (2013). *Multi-criteria decision analysis: methods and software*. John Wiley & Sons.
- Mastos, T. D., Nizamis, A., Vafeiadis, T., Alexopoulos, N., Ntinis, C., Gkortsis, D., Papadopoulos, A., Ioannidis, D., & Tzovaras, D. (2020). Industry 4.0 sustainable supply chains: An application of an IoT enabled scrap metal management solution. *Journal of Cleaner Production*, 269, 122377.

- Nyenke, O. K. W. (2021). Value stream mapping: A tool for waste reduction. *International Journal of Innovative Research and Development*, 10(6), 13 - 20.
- Parreiras, R. O., Maciel, J. H., & Vasconcelos, J. A. (2006). The a posteriori decision in multiobjective optimization problems with smarts, promethee II, and a fuzzy algorithm. *IEEE Transactions on Magnetics*, 42(4), 1139-1142.
- Rekiek, B., De Lit, P., & Delchambre, A. (2002). Hybrid assembly line design and user's preferences. *International Journal of Production Research*, 40(5), 1095-1111.
- Rekiek, B., De Lit, P., Pellichero, F., L'Eglise, T., Fouda, P., Falkenauer, E., & Delchambre, A. (2001). A multiple objective grouping genetic algorithm for assembly line design. *Journal of intelligent manufacturing*, 12, 467-485.
- Rinaldi, M., Caterino, M., Fera, M., Manco, P., & Macchiaroli, R. (2021). Technology selection in green supply chains-the effects of additive and traditional manufacturing. *Journal of Cleaner Production*, 282, 124554.
- Rizzo, A., Goel, S., Luisa Grilli, M., Iglesias, R., Jaworska, L., Lapkovskis, V., Novak, P., Postolnyi, B. O., & Valerini, D. (2020). The critical raw materials in cutting tools for machining applications: A review. *Materials*, 13(6), 1377.
- Roux, O., Duvivier, D., Dhaevers, V., Meskens, N., & Artiba, A. (2008). Multicriteria approach to rank scheduling strategies. *International Journal of Production Economics*, 112(1), 192-201.
- Ugoji, K. U., Isaac, O. E., Nkoi, B., & Wofuru-Nyenke, O. (2022). Improving the Operational Output of Marine Vessel Main Engine System through Cost Reduction using Reliability. *International Journal of Engineering and Modern Technology (IJEMT)*, 8(2), 36-52.
- Waeyenbergh, G., Vannieuwenhuyse, B., & Pintelon, L. (2004). A model to determine the cleanliness measurement interval in an automotive paint shop. *Journal of Quality in Maintenance Engineering*, 10(1), 37-46.
- Wofuru-Nyenke, O. (2024a). Biodegradable Cutting Fluids Evaluation for Sustainable Machining Processes. *Universal Journal of Green Chemistry*, 117-124.
- Wofuru-Nyenke, O. (2024b). Reliability assessment and accelerated life testing in a metalworking plant. *Future Technology*, 3(3), 1-7.
- Wofuru-Nyenke, O. (2024c). Routing and facility location optimization in a dairy products supply chain. *Future Technology*, 3(2), 44-49.
- Wofuru-Nyenke, O., & Briggs, T. (2022). Predicting demand in a bottled water supply chain using classical time series forecasting models. *Journal of Future Sustainability*, 2(2), 65-80.
- Wofuru-Nyenke, O. K. (2020). Design Analysis of a Portable Manual Tyre Changer. *European Journal of Engineering and Technology Research*, 5(11), 1307-1318.
- Wofuru-Nyenke, O. K. (2021). Leading-edge production engineering technologies. *Journal of Newviews in Engineering and Technology (JNET)*, 3(4), 9-17.
- Wofuru-Nyenke, O. K. (2022). Forecasting Model Accuracy Assessment in a Bottled Water Supply Chain. *International Journal of Engineering and Modern Technology*, 8(5), 101-108.

- Wofuru-Nyenke, O. K. (2023a). Carbon Emissions Modeling for Smarter Carbon Footprint Decisions: A Systematic Review. *BOHR International Journal of Civil Engineering and Environmental Science (BIJCEES)*, 1(2), 75 - 87.
- Wofuru-Nyenke, O. K. (2023b). Mechanized cover crop farming: Modern methods, equipment and technologies. *Circular Agricultural Systems*, 3(1).
- Wofuru-Nyenke, O. K. (2024d). Critical path method utilization for optimal scheduling of production activities. *Future Sustainability*, 2(3), 1-5.
- Wofuru-Nyenke, O. K., Briggs, T. A., & Aikhuele, D. O. (2023). Advancements in sustainable manufacturing supply chain modelling: a review. *Process Integration and Optimization for Sustainability*, 7(1), 3-27.
- Wofuru-Nyenke, O. K., Nkoi, B., & Oparadike, F. E. (2019). Waste and Cost Reduction for a Water Bottling Process Using Lean Six Sigma. *European Journal of Engineering and Technology Research*, 4(12), 71-77.
- Zekhnini, K., Cherrafi, A., Bouhaddou, I., Benghabrit, Y., & Garza-Reyes, J. A. (2021). Supply chain management 4.0: a literature review and research framework. *Benchmarking: An International Journal*, 28(2), 465-501.